

NC EDM SYSTEMS

SG Series

SG
series

 Maisart D-CUBES

GLOBAL IMPACT OF MITSUBISHI ELECTRIC



Through Mitsubishi Electric's vision, "Changes for the Better" are possible for a brighter future.

Changes for the Better

"Changes for the Better" represents the Mitsubishi Electric Group's attitude to "always strive to achieve something better", as we continue to change and grow. Each one of us shares a strong will and passion to continuously aim for change, reinforcing our commitment to creating "an even better tomorrow".

Mitsubishi Electric is involved in many areas including the following:

Energy and Electric Systems

A wide range of power and electrical products from generators to large-scale displays.

Electronic Devices

A wide portfolio of cutting-edge semiconductor devices for systems and products.

Home Appliance

Dependable consumer products like air conditioners and home entertainment systems.

Information and Communication Systems

Commercial and consumer-centric equipment, products and systems.

Industrial Automation Systems


Maximizing productivity and efficiency with cutting-edge automation technology.

Our advances in AI and IoT are adding new value to society in diverse areas from automation to information systems. The creation of game-changing solutions is helping to transform the world, which is why we are honored to be recognized in the 2019 "Forbes Digital 100" as one of world's most influential digital corporations.

#41

2019 FORBES
TOP 100 DIGITAL COMPANIES

Mitsubishi Electric continues the challenge to be the only one FA machine and systems supplier delivering total customer satisfaction.

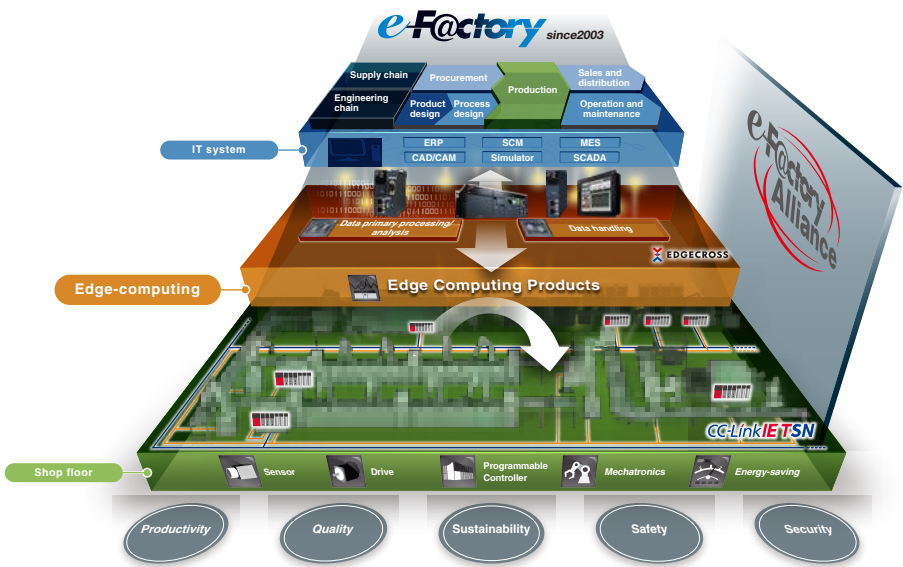

Mitsubishi Electric is a world-leading general electrical and electronic products manufacturer with wide-ranging business reach, from appliances for the home to systems used in outer space. Global-scale business development is in five business domains: heavy electrical machinery and systems, industrial automation, information and communication systems, electronic devices, and home appliances. Producing general electrical machinery for over 90 years, as Mitsubishi Electric's Factory Automation Systems Business Group, we have supported manufacturing in Japan, China, and Asia, and around the globe. In doing so, we have accumulated and refined technologies for FA control, drive control, automation, and manufacturing that are utilized to expand and improve a vast product lineup, such as controllers, drives, and automation and power distribution control products. In addition to product components like those listed above, we are quick to propose systems such as e-F@ctory and iQ Platform as solutions for production site innovation. As a comprehensive supplier of FA products and systems, Mitsubishi Electric will continue to respond to the voice of customers and deliver products of the utmost quality throughout the world.

INDEX

1. History of Mitsubishi Electric EDMs.....	3	8. Productivity.....	17
2. SG Series.....	5	9. Operability.....	19
3. NC-EDM Systems.....	7	10. Power Supply/ Control Specifications and Options	23
4. Line up.....	9	11. Tooling	25
5. Functions and Features	13	12. Preparation for Machine Installation/ Cautions ..	27
6. Samples.....	15	13. Production Bases/ Solutions.....	29
7. Machining Accuracy	16		

1
2
3
4
5
6
7
8
9
10
11
12
13

The history of Mitsubishi Electric EDMs is the history of electrical-discharge machining

1964-



1964
DM201
Production started 1964
Thyristor power supply
Hydraulic servo system



1965
DM500+DE90T
Began shipment in Nov. 1965



1967
DM250+DE30T
Began shipment in Feb. 1967
Transistor pulse power supply



1971
DM100
Began shipment in Dec. 1971



1972
DM300N+EP120M
Began shipment in Jul. 1972



1974
DK700
Began shipment in Oct. 1974



1976
DK280
Began shipment in Apr. 1976



1978
DK140
Began shipment in Sep. 1978

1980-



1980
DK360NC
Began shipment in May 1980



1982
M30
Began shipment in Jan. 1982
Motor servo system



1982
M35C2
Began shipment in May 1982



1982
M55
Began shipment in Dec. 1982



1982
M25C3
Began shipment in Dec. 1982



1982
M55C6
Began shipment in Dec. 1982
Equipped with 16bit CNC



1986
M25KC4
Began shipment May 1986
Equipped with ultralow-wear power supply (slope control system)



1986
M35K
Began shipment in May 1986



1987
M85KW
Began shipment in Feb. 1987



1988
M115K
Began shipment in Jan. 1988



1988
EML20
Began shipment in Aug. 1988



1989
M35J
Began shipment in May 1989



1989
M35S
Began shipment in Dec. 1989

1990-



1990
M65E
Began shipment in Mar. 1990



1991
V35F
Began shipment in Feb. 1991
Equipped with 32bit CNC and FUZZY Control



1992
VP35F
Began shipment in Jun. 1992
NS powder specifications



1994
ADMAQ-E
Began shipment in Oct. 1994



1994
VX10
Began shipment in Dec. 1994



1995
VX20
Began shipment in Jan. 1995



1995
EX8
Began shipment in Jan. 1995



1996
EX30
Began shipment in Jun. 1996



1996
EDSCAN8E
Began shipment in May. 1996



1999
EA12E
Began shipment in Aug. 1999
Equipped with 64bit CNC



1999
EA8
Began shipment in Oct. 1999

2000-



2001
VA10
Began shipment in Apr. 2001



2001
MA2000
Began shipment in May 2001
Equipped with thermal displacement compensation



2004
EA8P
Began shipment in Feb. 2004



2004
EA12V
Began shipment in Apr. 2004
Equipped with V power supply (tungsten carbide circuit standard equipment)



2006
EA8PV
Began shipment in Jun. 2006
Equipped with ultrafine matte finish circuit (NP circuit)



2007
EA28V
Began shipment in Jan. 2007



2008
EA12V ADVANCE
Began shipment in Feb. 2008
Equipped with ADVANCE control device



2008
EA28V ADVANCE
Began shipment in Feb. 2008



2008
EA8PV ADVANCE
Began shipment in Feb. 2008

2010-



2014
EA8S
Began shipment in Feb. 2014



2015
EA12S
Began shipment in Mar. 2015



2016
EA8PS
Began shipment in Feb. 2016



2016
EA12PS
Began shipment in Feb. 2016



2018
SV12P
Began shipment in Aug. 2018



2019
SG12
Began shipment in May. 2019

2021 SG28



Next-generation machine incorporating the Mitsubishi
and control unit (D-CUBES) to pursue both high performance and high productivity

"Challenge!"
with
"AI technology"



High productivity machine

SG Series

 Maisart

 D-CUBES

Die-sinker EDM pursuing high productivity




SG Series

NC-EDM Systems

An extensive product lineup ready to support the most diversified needs, from high-precision machining of small workpieces to highly productive machining of large workpieces. Mitsubishi Electric die-sinker EDMs offer comprehensive solutions that contribute to improving the productivity of customers' facilities.

High precision machine SV-P Series

High-end model incorporating the AI technology (Maisart) to pursue both accuracy and productivity

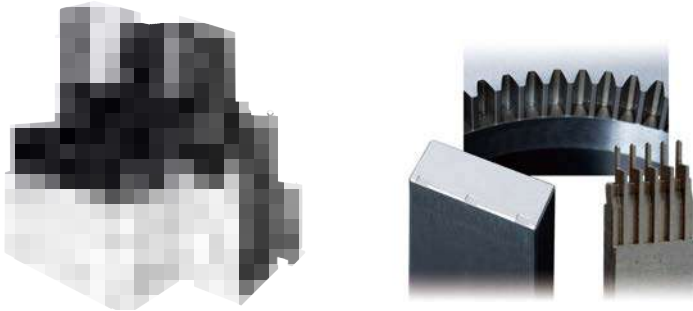


High productivity machine SG Series

Supports various machining needs in pursuit of higher productivity



EA8S (front door)

Supports various machining needs in pursuit of higher productivity

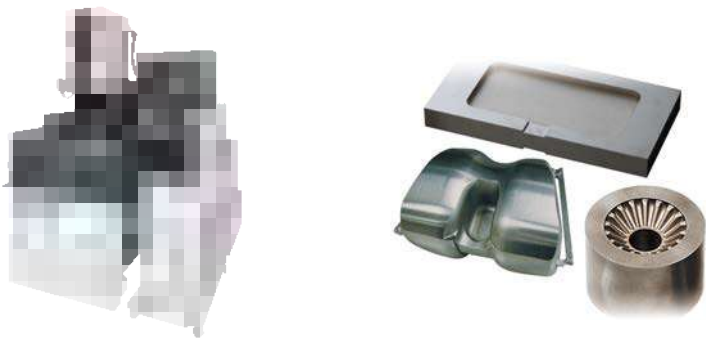

Large-size high performance machine

EA-V ADVANCE Series

Standard model pursuing high performance and high productivity



Equipped with the latest IoT-compatible control unit for stable machining and higher productivity.

High productivity machine SG8



Automatic elevation working tank specification (standard)

Model	SG8M
Axis travel [mm(in)]	X:300 Y:250 Z:250 (11.8×9.8×9.8)
Max workpiece dimensions(W x D x H) [mm(in)]	770×490×200 (30.3×19.3×7.9)
Max. workpiece weight [kg(lb.)]	550(1213)
Max. electrode weight [kg(lb.)]	25(55)

SG12





Automatic elevation working tank specification (standard)

Model	SG12M
Axis travel (mm(in))	X:400 Y:300 Z:300 (15.7×11.8×11.8)
Max workpiece dimensions(W x D x H) (mm(in))	900×650×350 (35.4×25.6×13.8)
Max. workpiece weight (kg(lb.))	1000(2205)
Max. electrode weight (kg(lb.))	50(110)

Standard function	Option
<ul style="list-style-type: none"> • Adaptive control (Maisart/IDPM3) • HGM2 circuit • Z axis Liner scale¹⁾ • Thin LCD operation box 	<ul style="list-style-type: none"> • Automatic elevation working tank • SS Jump • Built-in scheduler • Machining Monitor Screen • Dielectric fluid distributor
	<ul style="list-style-type: none"> • XY axis Liner scale • Z axis Liner scale²⁾ • High-rigidity C-axis • Automatic clamp • LS type tool changer
	<ul style="list-style-type: none"> • Dielectric fluid suction function • Dielectric fluid emission automatic control function • GV120 power supply¹⁾ • SP power supply³⁾
	<ul style="list-style-type: none"> • 3D check function • External signal output • Warning light (Tower/Built-in) • Anti-virus protection

*1 Only SG12 *2 SG12 is standard *3 When the SP power supply is used, machine installation dimensions differ. Detail on the other page

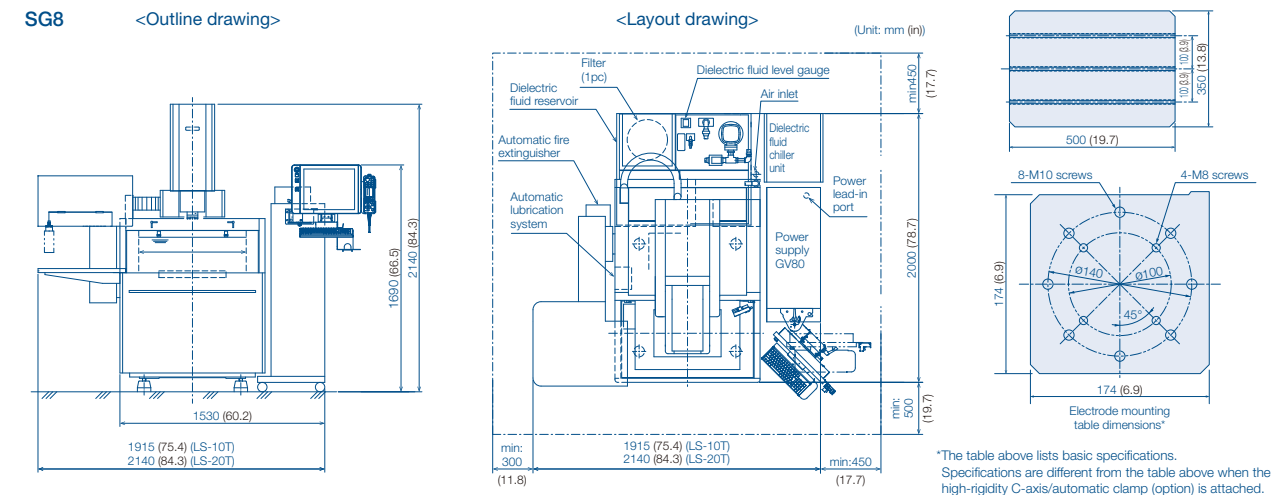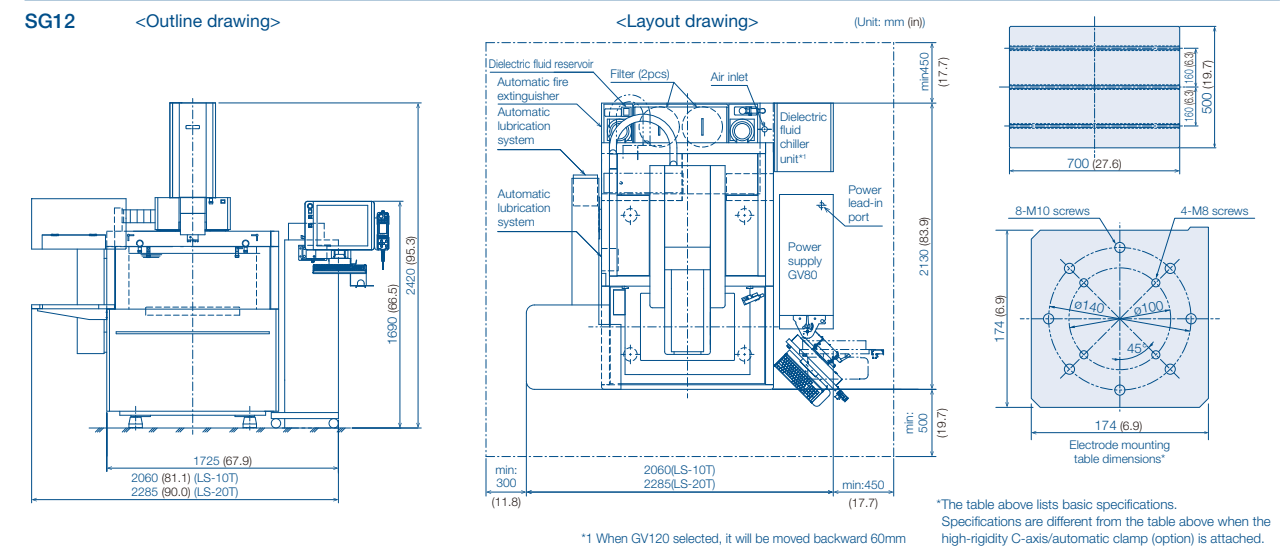

Machine main unit (standard specifications)

Model			SG8M	SG12M
Machine main unit	Dimensions (W × D × H)	[mm(in)]	1530 × 2000* × 2140 (60.2 × 78.7 × 84.3)	1725 × 2130* × 2420 (67.9 × 83.9 × 95.3)
	Total system weight	[kg(lb.)]	2000 (4409)	3500 (7716)
Axial travel	(X × Y × Z)	[mm(in)]	300 × 250 × 250 (11.8 × 9.8 × 9.8)	400 × 300 × 300 (15.7 × 11.8 × 11.8)
Spindle	Distance between table and electrode mounting surface	[mm(in)]	150-400 (5.9-15.7)	200-500 (7.9-19.7)
	Max. electrode weight	[kg(lb.)]	25 (55)	50 (110)
Working tank	System		Automatic elevation system	
	Inner dimensions (W × D × H)	[mm(in)]	800 × 520 × 300 (31.5 × 20.5 × 11.8)	950 × 700 × 450 (37.4 × 27.6 × 17.7)
	Fluid level adjustment range (from top of table)	[mm(in)]	60-250 (2.4-9.8)	65-400 (2.6-15.7)
	Dimensions (W×D)	[mm(in)]	500 × 350 (19.7 × 13.8)	700 × 500 (27.6 × 19.7)
Table	Max. workpiece dimensions (W × D × H)	[mm(in)]	770 × 490 × 200 (30.3 × 19.3 × 7.9)	900 × 650 × 350 (35.4 × 25.6 × 13.8)
	Distance between floor and top of table	[mm(in)]	900 (35.4)	900 (35.4)
	Max. workpiece weight	[kg(lb.)]	550 (1213)	1000 (2205)
	T-slot		12-100mm pitch 3Slots	12-160mm pitch 3Slot
Dielectric fluid reservoir	Capacity (initial dielectric fluid supply amount)	[ℓ(gal.)]	260 (68.6) (270 (71.3))	360 (95.0) (470 (124.1))
	Filtering system		Paper filter 1pc	Paper filter 2pcs
	Dielectric fluid chiller unit		Unit cooler	

* Without Dielectric fluid chiller unit.

C-axis/ATC (Option)

			3R		EROWA	
			MACRO	Combi	ITS	COMBI
C-axis	Max. electrode weight	10 {22} {SG8} 50 {110} {SG12} *1				
	Speed (rpm)	1 - 30				
		[kg(lb.)]				
		[min'l]				

*1 For macro Jr of 3R combi and Compact of EROWA COMBI, the weight is 2.5 kg(5.5lb.) /electrode.

					3R			
					MACRO	Combi	EROWA	
							ITS	COMBI
ATC	LS-10T	Max. electrode dimensions	54x54x200 (2.1x2.1x7.9)	[mm(in)]	○	○ ^{+3 +4}	○ ⁺⁵	○ ⁺⁶
		Max. electrode weight	5kg (11lb.) ⁺² Magazine total: 20kg (44lb.)					
	LS-20T	Max. electrode dimensions	54x54x200 (2.1x2.1x7.9)	[mm(in)]	○	○ ^{+3 +4}	○ ⁺⁵	○ ⁺⁶
		Max. electrode weight	10kg (22lb.) ⁺² Magazine total: 40kg (88lb.)					

*2 For MACRO of 3R Combi, the weight is 5kg (11lb.) / electrode, is 2.5kg (5.5lb.) / electrode with MACRO Jr, and Compact of EROWA COMBI, the weight is 2.5kg (5.5lb.) / electrode.

*3 Magazine total of macro Combi is 40Kg (88lb.).

*4 For 3R Combi Macro and Macro Jr can be used each other.

*5 Only the ITS50 specification is available, and the centering plate 50 can be used.

*6 Centering plate 50 and the Compact can be used each other.

Delivery machine size					(mm)(in)
		SG8M		SG12M	
		Width	Height	Width	Height
Without ATC		1080 (42.5)	2140 (84.3)	1280 (50.4)	2420 (95.3)
LS type	10T	1465 (57.7)	2140 (84.3)	1615 (63.6)	2420 (95.3)
	20T	1690 (66.5)	2140 (84.3)	2175 (85.6)	2420 (95.3)

Distance between table and electrode mounting surface

			EROWA ITS	3R MACRO	3R Combi	
					MACRO	Jr
SG8M	High-rigidity C-axis	[mm(m)]	150 - 400 (5.9 - 15.7)	133 - 383 (5.2 - 15.1)	133 - 383 (5.2 - 15.1)	143 - 393 (5.6 - 15.5)
	Spindle	[mm(m)]	150 - 400 (5.9 - 15.7)	133 - 383 (5.2 - 15.1)	133 - 383 (5.2 - 15.1)	143 - 393 (5.6 - 15.5)
	Automatic clamp	[mm(m)]	150 - 400 (5.9 - 15.7)	148 - 398 (5.8 - 15.7)	148 - 398 (5.8 - 15.7)	158 - 408 (6.2 - 16.1)
SG12M	High-rigidity C-axis	[mm(m)]	200 - 500 (7.9 - 19.7)	183 - 483 (7.2 - 19.0)	183 - 483 (7.2 - 19.0)	193 - 493 (7.6 - 19.4)
	Spindle	[mm(m)]	200 - 500 (7.9 - 19.7)	183 - 483 (7.2 - 19.0)	183 - 483 (7.2 - 19.0)	193 - 493 (7.6 - 19.4)
	Automatic clamp	[mm(m)]	200 - 500 (7.9 - 19.7)	198 - 498 (7.8 - 19.6)	198 - 498 (7.8 - 19.6)	208 - 508 (8.2 - 20.0)

Line up

SG28




Automatic elevation working tank specification (standard)

Model	SG28M
Axis travel	X:650 Y:450 Z:400 (25.6 Y17.7 Z15.7)
Max. workpiece dimensions(W x D x H)	1050x760x350 (41.3x29.9x13.7)
Max. workpiece weight	2000 (4410)
Max. electrode weight	200 (441)

Standard function	Option
<ul style="list-style-type: none">Adaptive control (Maisart/IDPM3)HGM2 circuitZ axis Liner scaleThin LCD operation boxThermal displacement compensation system	<ul style="list-style-type: none">Automatic elevation working tankSS JumpBuilt-in schedulerMachining Monitor ScreenDielectric fluid distributor
	<ul style="list-style-type: none">XY axis Liner scaleHigh-rigidity C-axisHigh-accuracy built-in spindleAutomatic clampLS /MVH type tool changerLarge electrode adaptor (T slot/ Dovetail)
	<ul style="list-style-type: none">Dielectric fluid suction functionDielectric fluid emission automatic control functionGV120 power supply^{*1}SP power supply^{*1}NP2 circuit
	<ul style="list-style-type: none">3D check functionExternal signal outputWarning light (Tower/Built-in)Anti-virus protection

^{*1} When the SP power supply is used, machine installation dimensions differ. Detail on the other page

SG28

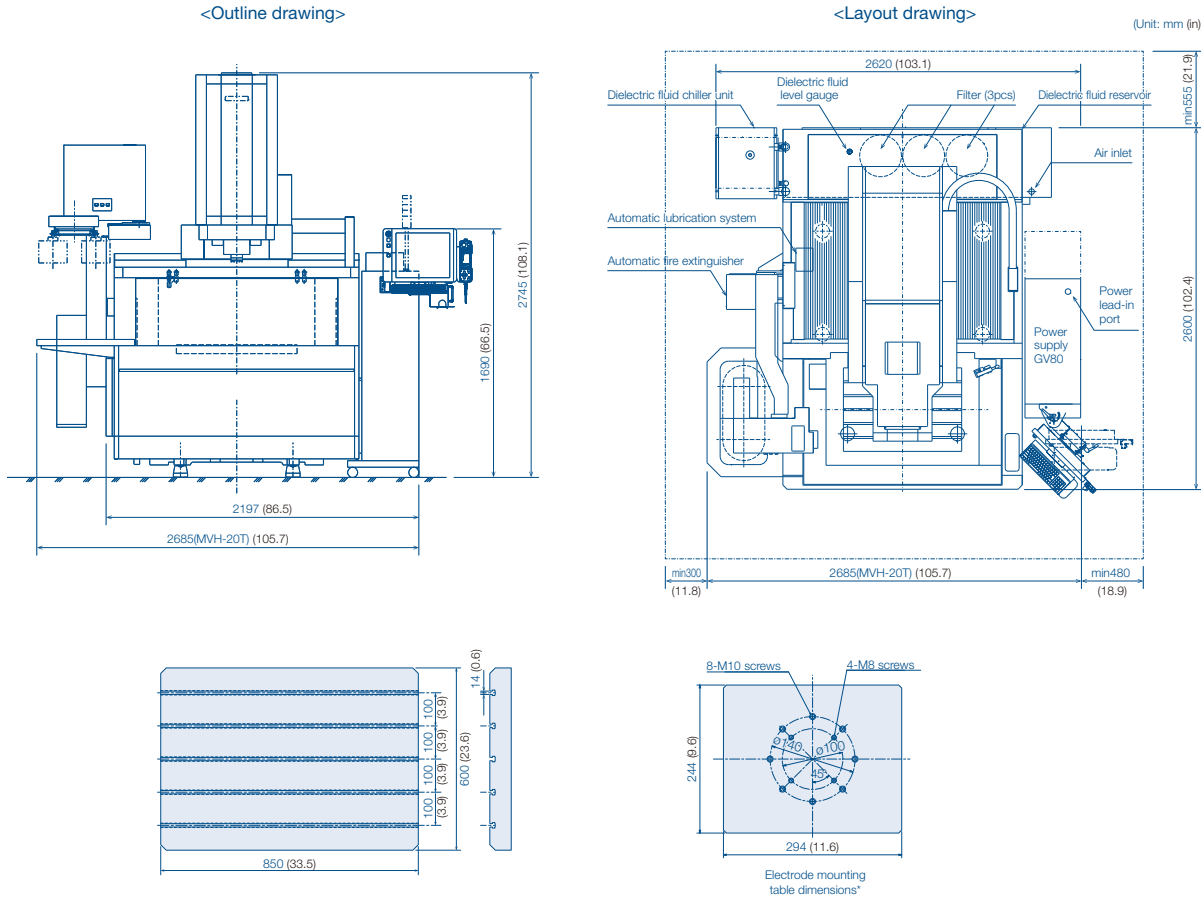

^{*} The table above lists basic specifications.
Specifications are different from the table above when the high-rigidity C-axis/automatic clamp (option) is attached.

Machine main unit (standard specifications)

Model	SG28M	
Machine main unit	Dimensions (W x D x H)	2620 x 2600 x 2745 (103.1 x 102.4 x 108.1)
	Total system weight	5600 (12320)
Axial travel	(X x Y x Z)	650 x 450 x 400 (25.6 x 17.7 x 15.7)
Spindle	Distance between table and electrode mounting surface	280-680 (11.0-26.8)
	Max. electrode weight	200 (440)
Working tank	System	Automatic elevation system
	Inner dimensions (W x D x H)	1100 x 810 x 450 (43.3 x 31.9 x 17.7)
	Fluid level adjustment range (from top of table)	75-400 (3.0-15.7)
Table	Dimensions (W x D)	850 x 600 (33.5 x 23.6)
	Max. workpiece dimensions (W x D x H)	1050 x 760 x 350 (41.3 x 29.9 x 13.8)
	Distance between floor and top of table	900 (35.4)
	Max. workpiece weight	2000 (4400)
	T-slot	14-100mm pitch 3slots
Dielectric fluid reservoir	Capacity (initial dielectric fluid supply amount)	390 (102.9) (595 (157.1))
	Filtering system	Paper filter 3pcs
	Dielectric fluid chiller unit	Unit cooler

Distance between table and electrode mounting surface

			3R			
			ITS	MACRO	MACRO	Jr
SG28M	High-rigidity C-axis	[mm(in)]	175 - 575 (6.9 - 22.6)	158 - 558 (6.2 - 22.0)	158 - 558 (5.2 - 15.1)	168 - 568 (2.2 - 22.4)
	Spindle	[mm(in)]	154 - 554 (6.1 - 21.8)	137 - 537 (5.3 - 21.1)	137 - 537 (5.3 to 21.1)	147 - 547 (5.8 to 21.5)
	Automatic clamp	[mm(in)]	175 - 575 (6.9 - 22.6)	158 - 558 (6.2 - 22.0)	—	—

C-axis/ATC (Option)

				3R		EROWA		
				MACRO	Combi	ITS	COMBI	
C-axis		Max. electrode weight	50 (110)* ¹	[kg(lb.)]	○	○	○	○
		Speed (rpm)	1 - 30	[min-1]				
Spindle type		Max. electrode weight	10 (22)* ¹	[kg(lb.)]	○	○	○	○
		Speed (rpm)	1 - 1500	[min-1]				

^{*1} For macro Jr of 3R combi and Compact of EROWA COMBI, the weight is 2.5 kg (5.5lb.)/electrode.

				3R		EROWA	
				MACRO	Combi	ITS	COMBI
ATC	LS-10T	Max. electrode dimensions	54x54x200 (2.1x2.1x7.9)	[mm(in)]	○	○ ^{*3 4}	○ ^{*5}
		Max. electrode weight	5kg (11lb.)/ electrode ^{*2} Magazine total: 20kg (44lb.)		○	○ ^{*3 4}	○ ^{*5}
	LS-20T	Max. electrode dimensions	54x54x200 (2.1x2.1x7.9)	[mm(in)]	○	○ ^{*3 4}	○ ^{*5}
		Max. electrode weight	10kg (22lb.)/ electrode ^{*2} Magazine total: 40kg (88lb.)		○	○ ^{*3 4}	○ ^{*5}
	MVH 20T	Max. electrode dimensions	70x70x200 (2.8x2.8x7.9)	[mm(in)]	○	○ ^{*3 4}	○ ^{*5}
		Max. electrode weight	10Kg (22lb.) ^{*2} Magazine total: 80Kg (176lb.) ^{*3}		○	○ ^{*3 4}	○ ^{*5}
	MVH 40T	Max. electrode dimensions	70x70x200 (2.8x2.8x7.9)	[mm(in)]	○	○ ^{*3 4}	○ ^{*5}
		Max. electrode weight	10kg (22lb.) ^{*2} Magazine total: 80Kg (176lb.) ^{*3}		○	○ ^{*3 4}	○ ^{*5}

^{*2} For MACRO of 3R Combi, the weight is 5kg (11lb.)/ electrode, is 2.5kg (5.5lb.)/ electrode with MACRO Jr, and Compact of EROWA COMBI, the weight is 2.5kg (5.5lb.)/ electrode.

^{*3} Magazine total of macro Combi is 40Kg (88lb.).

^{*4} For 3R Combi Macro and Macro Jr can be used each other.

^{*5} Only the ITS50 specification is available, and the centering plate 50 can be used.

^{*6} Centering plate 50 and the Compact can be used each other.

Delivery machine size		SG28M	
LS type		Width	Height
		1990 (78.4)	2745 (108.1)
20T	10T	2170 (85.4)	2745 (108.1)
	20T	2395 (94.3)	2745 (108.1)
MVH type	20T	2475 (97.4)	2745 (108.1)
	40T ^{*7}	Inquiry separately	2745 (108.1)

^{*7} MVH-40T specification obtained by removing both the ATC main unit and retainer. This is required for installation when using crane and for assembly.

Functions and Features

New functions to further innovate machining performance.




High productivity

Refer to P17 - P18


AI adaptive control: Maisart
Automatic depth recognition improves stability in deep machining such as gate machining.

- Optimal machining control with AI and high-speed jump significantly improve machining efficiency.



Surface quality improvement <SG28>

- High rigidity structure and new power supply etc. improve machining surface quality.
- A small number of pinholes and small pinholes on the surface are realized.

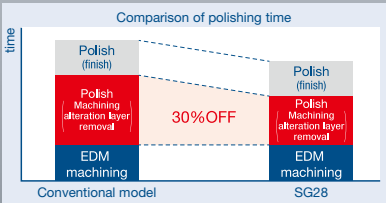

IDPM3

- Machining speed is up to 50% faster with the combination of highly accelerated (1.6G) jump control and adaptive control "IDPM3".
- Suppresses edge wear enables single electrode machining. Electrode cost, setup and machining time are significantly reduced.



Workability

Refer to P19 - P20



- The elevation tank provides high accessibility to the machine for setup and easily automated.
- Visualization of the machine's operation status with the built-in warning light (option).
- Large electrode can be exchanged easily by the electrode remove/mount timer.
- The condition of the back side of the workpiece is possible to check by installing the stainless steel plate at the back of the working tank. (SG28)
- The heights of the working tank and fluid level are adjusted automatically according to the height of the head(SG28).



3-sided automatic elevation working tank



Steel plate at the back of the working tank

Operability

Refer to P19-22




- 19 inch touch screen.
- HOME Screen is like a smartphone. You are able to reach various screen by "short-cut menu".
- The Navigation menu supports operation from setup to machining.
- New thin operation box is a standard equipment.
- Optimal conditions can be searched by refined search. The selected machining conditions can be easily adjusted with the adjustment bar.



HOME monitor



New operation box

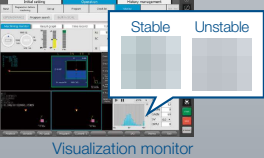


Visualization monitor




Condition search screen

- "Action menu" helps your operation. Table form programming display "ESPER D-CUBES".




ESPER

- Centralized management of consumables. The consumables screen manages usage time and replacement log of consumables.
- Power saving function to reduce power consumption. Reduces standby power consumption during idling at night, etc.



Maintenance contents




Maintenance items



D-CUBES

Samples

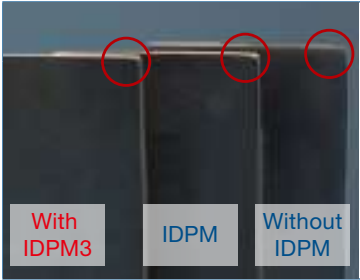

With IDPM3 IDPM Without IDPM

High speed machining with low electrode wear by IDPM3+SS jump

Model	SG12
Electrode	Graphite (TTK5)
Workpiece	Steel (SKD61)
Surface Roughness	Rz12.0μm/ Ra2.0μm
Machining accuracy	±0.010mm (.0004")

- High speed machining with Maisart. (machining depth: 40 mm, rough machining: 1.6 hours).
- Ultimate Low wear machining with IDPM3.(Electrode wear length: reduction by 50% or more compared with the conventional model)



Up to 30% faster submarine gate machining

Model	SG8
Electrode	Copper (ø1.2mm (.047"))
Workpiece	Steel (STAVAX)
Surface Roughness	Rz4.0μm/ Ra0.6μm
Machining accuracy	±0.003mm (.00012")

- Automatic depth recognition and stable servo control with Maisart improve machining stability.
- Jump control according to the machining progress raises the discharging efficiency of sludge, shortening machining time (reduced by up to 30% compared with the conventional model).



Machining time reduced by 30% by machining stabilization control

Model	SG12
Electrode	Copper (ø20(.79")/ ø30mm (1.18"))
Workpiece	Steel (STAVAX)
Surface Roughness	Rz4.0μm/ Ra0.5μm
Pre-machining left margin	±0.15mm (.0059")


- Stable finish surface machining is possible with the newly installed stabilization control.
- Achieving both stabilization of machining and shortening of machining time by AI technology "Maisart"



Machining time reduced by up to 25%

Model	SG12
Electrode	Graphite (TTK9)
Workpiece	Steel (SKD11)
Surface Roughness	Rz10μm/ Ra1.4μm
Machining accuracy	±0.010mm (.0004")


- Maisart's automatic depth recognition /discrimination function and servo stability control reduce machining time by up to 25%
- Electrode length wear of up to 50% with IDPM3.

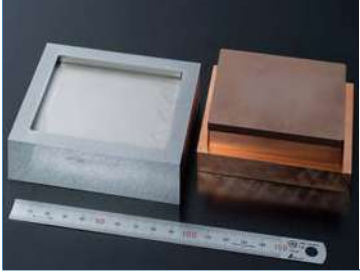

70×80mm cavity machining

Model	SG12
Electrode	Copper (70×80mm (2.76"×3.15"))
Workpiece	Steel (S-STAR)
Surface Roughness	Rz5.0μm/ Ra0.7μm
Bottom flatness 5μm	(.0002") or less
Machining accuracy	

- Automatic depth recognition and stable servo control with Maisart make uniform surface finish, reduction copper electrode low wear, reduction of burr and shortening of machining.
- Bottom of large area is machinable to a flatness within 5μm, Copper electrode wear and burrs are reduced thanks to higher rigidity and the thermal buster function.

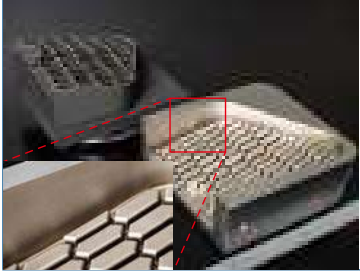

Graphite machining

Model	SG28
Electrode	Graphite (TTK5&9)
Workpiece	Steel (SKD61)
Surface Roughness	Rz6-7μm (Side, Bottom)
Machining depth	50mm (1.97")


- Stable machining is possible by high responsive servo and uniform surfaces of side and bottom are improved.
- Thermal displacement for machine is controlled and the stable accuracy for long-time machining is kept by thermal displacement compensation.
- Hole on the electrode to release gas which is particular for large shape is unnecessary by jump function with AI.

Machining Accuracy

Machining from fine to large size can be realized with high accuracy and high productivity.

High Rigidity Construction


- High rigidity construction is realized by structural change of cast.
 - ◆ Middle-Large area machining performance is improved.
- <SG28>
 - New model structure that Corresponds high speed jump, Z axis long stroke and lowering of the distance between table and electrode mounting surface is adopted.
 - Tracking performance to the command value is improve by reviewing the Z axis drive servo system.

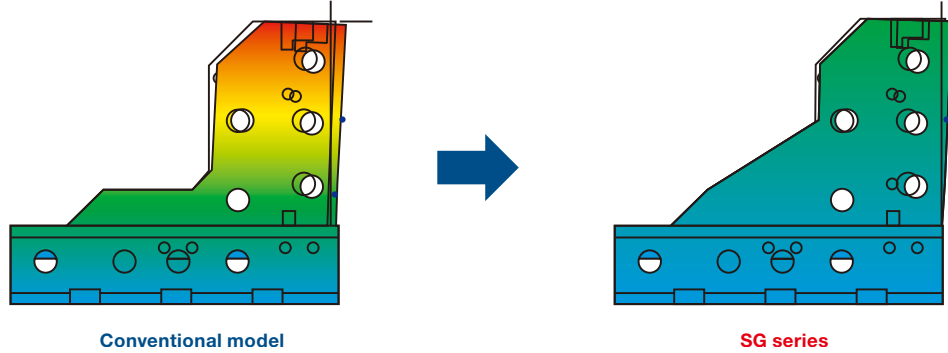


Thermal displacement compensation system (Only SG28 compatible)

- Thermal displacement of machine is reduced by Thermal displacement compensation system.
- Temperature change can visualized with 'visualization monitor'.
- High accuracy wide stroke pitch machining is realized with in-house NC equipments + original servo.

Explanatory view of thermal displacement compensation system

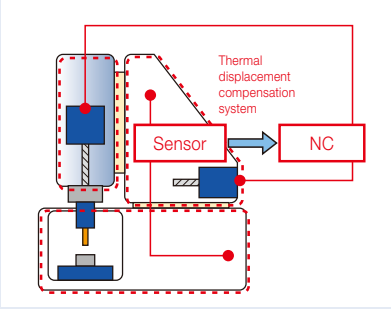


Temperature display screen

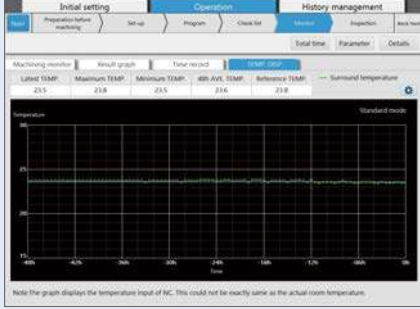

High-rigidity C-axis/ High precision spindle (Option)

- Highly accurate helical machining and index machining are possible.
- High-accuracy, high-rigidity C-axis with increased permission moment of inertia.

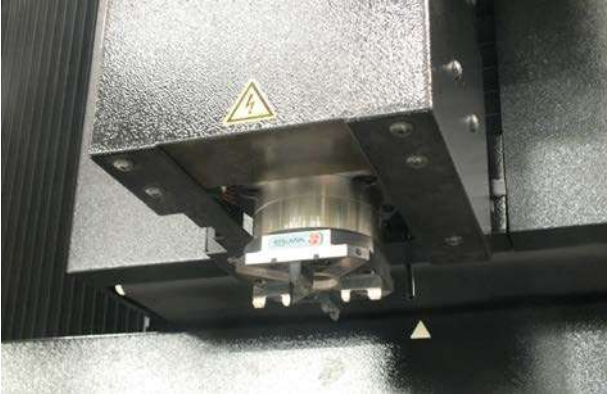

Productivity

Sensing technology (D-CUBES) and AI technology (Maisart) optimize machining in real time



AI adaptive control: Maisart

Automatic depth recognition improves stability in deep machining such as gate machining.

- Optimal machining control by AI and high-speed jump significantly improve machining efficiency.


AI adaptive control that enables stable gate machining at high speed



Machining state self-judgement

The control to stabilize the machining is optimized due to judging the machining state by itself with AI.


- Machining conditions are automatically adjusted according to prioritizing the machining speed or electrode wear.
- The concentrated dielectric discharge is detected early and controlled, and machining stability and machining speed are improved by judging the concentrated dielectric discharge every one jump.

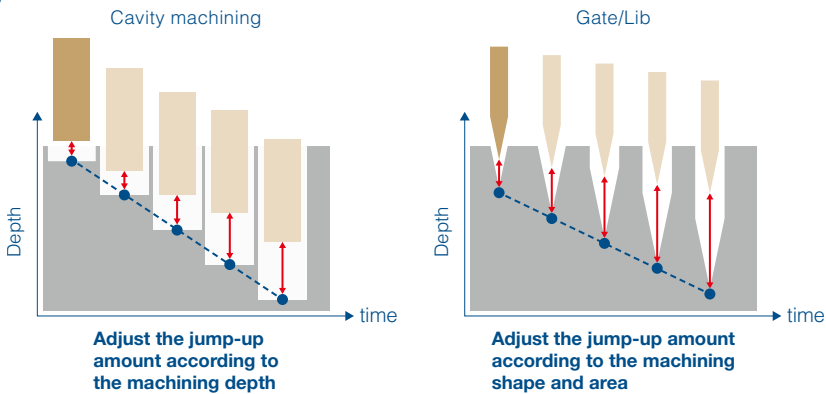

Machining adaptive control: IDPM3

High-speed/ Low-wear machining with graphite electrodes

- High speed and low wear improve productivity even when machining with multiple electrodes.
- Suppresses edge wear, enables single electrode machining.

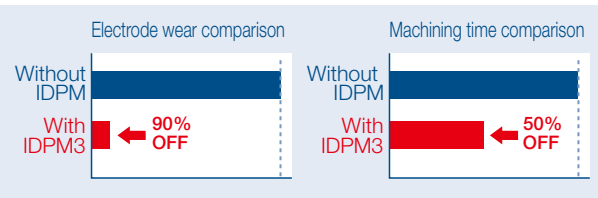


Conventional model:EA-V ADVANCE



Workpiece: Steel (SKD11)
Electrode: Graphite (TTK5)
Machining depth: 30mm(1.181")
Surface roughness: Rz12μm/Ra2.0μm

Tungsten carbide high-speed machining

- Machining speed is improved up to 60% with copper-graphite electrode and IDPM3.

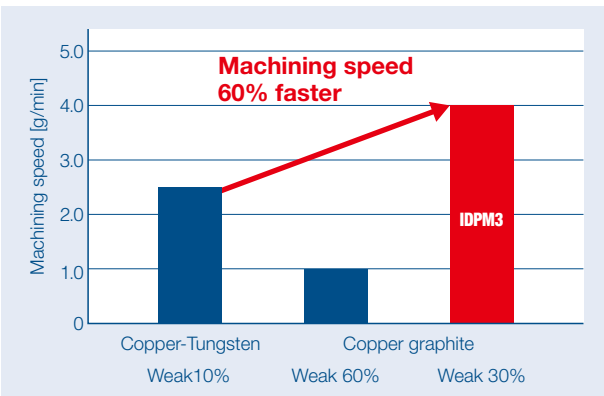


* Machining performance may vary depending on machine specifications and electrode materials.

Machining speed improved with IDPM3 advanced adaptive control and SS Jump jump control

- Mitsubishi Electric's IDPM3 adaptive control is utilized not only for graphite electrode machining, but widely applied for copper electrode machining as well.
- Machining speed increased up to 40% by raising the speed and acceleration of the SS Jump jump control function.

▶SS Jump comparison video

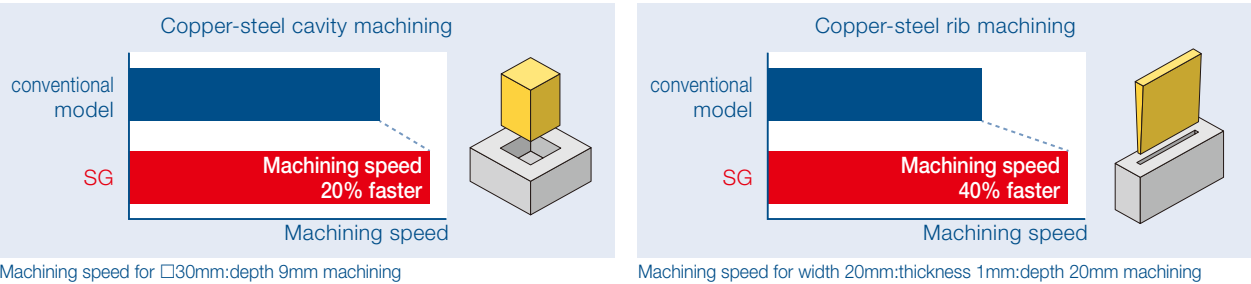


Improved surface quality for medium and large area machining <SG28>


- High rigidity structure and new power supply etc. improve machining surface quality.
- A small number of pinholes and small pinholes on the surface are realized.




Electrode :Graphite (TTK5) 2 pcs
Workpiece :Steel (SKD61)
Size :□150mm (with rough-cut)
Under size :0.2mm (.0079")
Depth :6mm (.236")
Roughness :Rz10.0μm (mark)



Some pinholes





A small number of pinholes

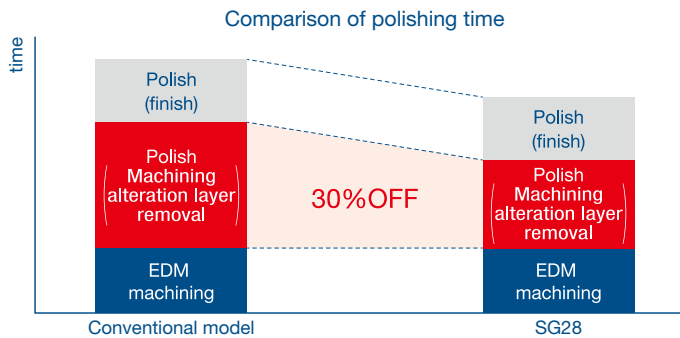

Even if machining in the same time as the conventional machine, the polishing time is shortened.

Tungsten carbide machining (SP power supply:Option)


- Electrode wear of copper electrode dramatically improved, even standard SC circuit.
- Tungsten carbide machining speed is improved up to 50 % with SP power supply.

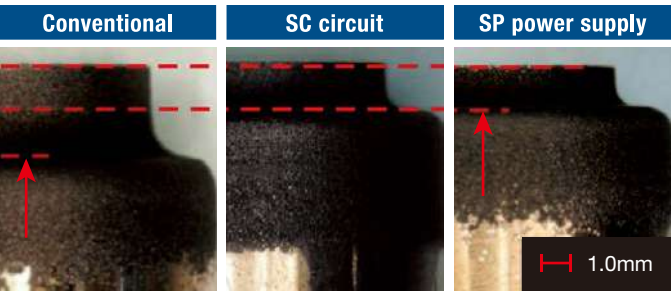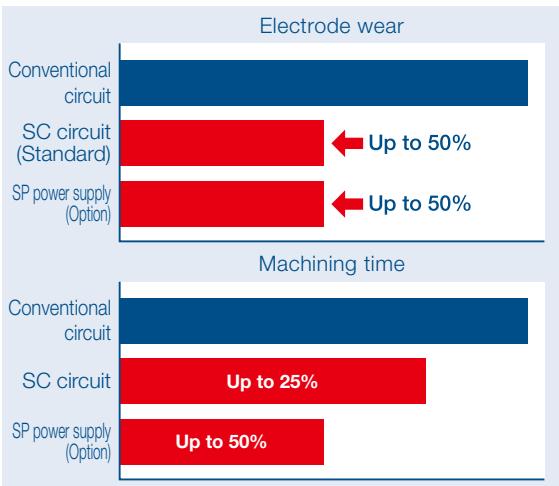

Operability


Control unit

- Information is displayed on a new large 19-inch touch screen.
- Keyboard and mouse are standard.
- Intuitive operation is performed by gestures on a multi-touch supporting panel.



Thin LCD operation box


- The new design of the thin liquid crystal manual pendant box improves workpiece setup and saves time.
- The hand-held operation box is equipped with an LED flash light on the back.



● Magnified view of coordinates



● Various setup functions
● Screen customization

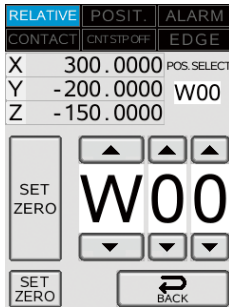

● Teaching function


Table



● Increased the number of T-slot to improve setup

Movement speed <SG8, 12>

- Setup time reduced by faster jog speed. Jog speed can be customizable.

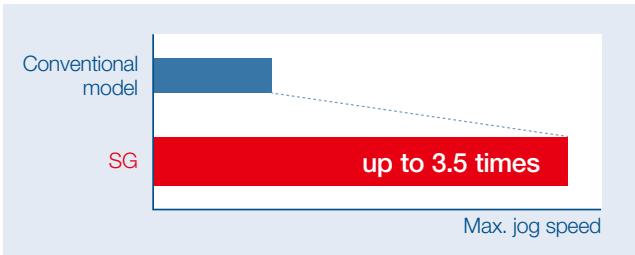


3-sided automatic elevation tank

- 3-sided automatic elevation tank standardized. Improved access for workpiece setup.

Automatic working tank fluid level adjustment (ATA) (Only SG28 compatible)

- The heights of the working tank and fluid level are adjusted automatically according to the height of the head.


Built-in scheduler

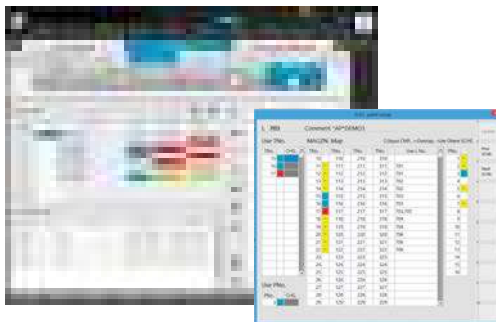

- Continuously run multiple programs on a schedule.
- Automatic multiple programs operation just by a single machine even without an external controller or machine.
- Easy to check if no multiple times usage of electrode.
- Schedules can be added and edited during machining.
- Schedules can be skipped and the registered status (such as waiting) can be changed easily.

Dimensional check support function (Only SG28 compatible)

- Manual check of the machining results is supported. (Notes function to input the coordinate values is available on the screen)

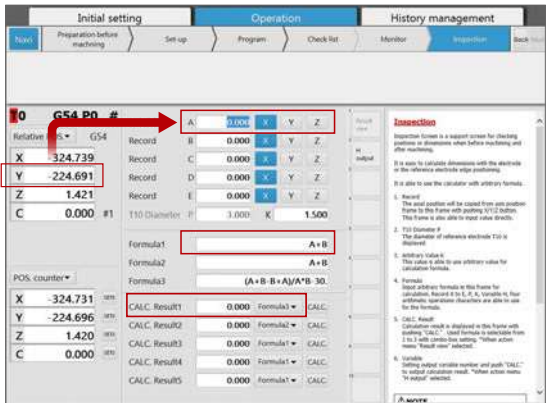

Operability

"Fast" and "Ergonomic"operation
Excellent performance with "Easy operation","human error reduction" and "connect ability" supporting productivity improvement for customers.



Operation

■Pre-machining preparation

●The maintenance manual as well as maintenance log are supported.

●Reduction in machine down time from insufficient maintenance.

■Setup

Changing electrodes, moving axes, and setting the working tank height.

●Workpiece measurement

Positioning workpieces, measuring workpiece offset, and checking dimensions.

●Electrode measurement

Measurement of electrode center, dimension check.

■Program

●"Action menu" helps your operation.

Table form programing display "ESPER D-CUBES".

Search machining condition

●The suitable condition is selected by factor selection and narrow down search.

●Adjustment bar for choosing "Speed" or "Uniformity".

Machining time estimation function

●Simply estimates machining time.

●Corrects the estimated time for improve estimated accuracy.

■Check list

All necessary operations to be performed before machining can be checked.

Check list

●The pre- machining checklist is displayed.

●The machine cannot be started if any checklist item has been skipped.

●Errors by operators who are not accustomed to using the machine are prevented.

■Machining Monitor Screen

Maisart realized the visualization of operation status on screen.

Automatic setting of adaptive control

●Our EDM know-how optimizes machining through automatic control settings.

●As machining progresses, the machining end time is updated more accurately, improving the efficiency of on-site work.

Initial setting

To set items which do not change daily like probe information, origin position, jog movement speed e.t.c.
●Basic machine settings, such as axis movement speed, measurement operation, and ATC operation.

Main menu

Navigate you by three tabs to set and check the setting quickly. This enables anyone to use information easily without any confusion about operating procedures and operation methods.

Machine log management

The operation event log, inspection and maintenance log consumables, and cost can be managed.

■Consumables management

- The consumables screen manages usage time and replacement log of all consumables.
- Machine supports management of consumable usage time and replacement history
- Prevent forgetting replacement at screen message
- Predict machining tank seal life on screen

9

Operability

21

22

Power Supply/ Control Specifications and Options

Power Supply and Control Specifications

Model		SG8M	SG12M/ SG28M
Power supply unit	Power supply model	GV80	GV80 (option GV120)
	Maximum machining current peak [A]	80	80 (option 120)
	Standard machining circuit and functions	Transfer pulse circuit (TP circuit), Ultralow-wear machining circuit (SC, α-SC circuit), Fine-matte finish circuit (PS circuit), Glossy mirror-finish circuit (HGM, HGM2 circuit), Narrow gap circuit, SS Jump, AI Adaptive control (Maisart/IDPM3)	
	Power supply system	Compact, resistor-less, low-heat generation, power regenerating energy-saving method	
Cooling system		Indirect cooling	
Control unit	Control unit	C41EA-2	
	Input method	Keyboard, USB flash memory, Ethernet	
	Pointing device	Touch panel, mouse	
	Display	19-in color TFT-LCD	
	Display characters	Alphanumeric characters	
	Number of control axes	Four axes (max.)	
	Setting (command) unit	XYZ···0.0001mm(.000004"), C (rotary axis)···0.0001deg	
	Minimum drive unit	XYZ···0.0001mm(.000004"), C (rotary axis)···0.0001deg	
	Manual feed	High-speed, low-speed, inching 0.001mm(.00004")/0.01mm(.0004"), extension mode (high-speed, low-speed), maximum feedrate: (SG8,SG12)7,000mm(275.59")/min(XYZ) (SG28) 4,000mm(157.5")/min(XYZ)	

Power Facilities Capacity

Model	SG8M		SG12M		SG28M	
Power supply	GV80	GV80	GV120	GV80	GV120	GV120
Maximum machining current average [A]	60	60	100	60	60	100
Maximum machining current peak [A]	80	80	120	80	80	120
Dielectric fluid chiller unit [kW]	1.74	1.74	3.5	1.74	3.5	3.5
Total input capacity [kVA]*1	6.5	7.0	10.0	9.0	13.0	13.0
Machine-generated heat value [kW]*2 *3	3.9	4.2	6.0	5.4	7.8	7.8

*1 Please add 5[kVA] for total input capacity with SP power supply specification.
*2 Reference value (heat value [kW] = Total input capacity (kVA) × 0.6)
*3 Please add 3[kW] for machine-generated heat value with SP power supply specification.

Network connection specifications

Data, such as NC programs, machining conditions and variables can be exchanged between a personal computer and EDM.
The required options differ according to the models and purpose, and can be confirmed using the following table.
One IP address must be prepared for each EDM within the user's in-house network.

Required specifications	Image drawing	Function	Supplement
Operate on the EDM side and receive data from personal computer		LAN/W	Use EDM's Explorer and receive data in the common HDD on the EDM side. After that, data I/O operations are required.
Operate on the EDM side and send data directly to the EDM's NC data area.		FTP	Data can be received only using data I/O operation.
Operate on the personal computer side and send data to the EDM		LAN/W	The personal computer's Explorer and the EDM's common HDD are used. After that, data I/O operations are required for the EDM.
Operate on the personal computer side and send data directly to the EDM's NC data area.		DNC	Commercially available DNC software must be installed on the personal computer side. Refer to DNC specifications operation for details.
Automatically send data from machining machine to FTP server		Operating status data output (Option)	Customer should prepare FTP server.
Automatically send data from machining machine to MTConnectAgent		MTConnect (Option)	Customer should prepare MTConnectAgent. Machine operating Status, alarm data, and machining history data are output using the MTConnect communication protocol.

Options

Options and retrofit specifications differ according to country and region; Please contact a Mitsubishi Electric representative for details. Main options correspondence table:

- Standard equipment,
○ Can be added after installation,
● Cannot be added after installation,
× Not available

Model				SG8M	SG12M	SG28M
Machine main unit	Lubricant	Automatic lubrication unit		○	○	○
	Scale	Scale feedback specification	Z-axis	●	○	○
			XY-axis	●	●	●
	Thermal displacement compensation system			×	×	○
Dielectric fluid system	Thin LCD operation box			○	○	○
	Fluid system	Dielectric fluid emission automatic control function*11		●	●	●
		Dielectric fluid suction function		○	○	○
		Dielectric fluid distributor		○	○	○
		Automatic working tank fluid level adjustment (ATA)		×	×	○
Power supply	Main power supply	GV80		○	○	○
		GV120		×	●	●
	Special power supply	NP2 circuit		×	×	●
		Narrow gap circuit		○	○	○
		Glossy mirror-finish circuit (HGM2)		○	○	○
		Machining circuit for difficult-to-machine materials (HPS)		×	×	●
		SP power supply (exclusive for tungsten carbide machining)*10		●	●	●
		EDCoating		×	×	×
Head-side tooling	High-rigidity C-axis*4			●	●	●
	High-accuracy built-in spindle*4			×	×	●
	Automatic clamp*4			●	●	●
	Large electrode adaptor			×	×	●
ATC	LS	10T	3R MACRO	●	●	●
			3R Combi	●	●	●
			EROWA ITS 50*5	●	●	●
			EROWA ITS Combi*6	●	●	●
		20T	3R MACRO	●	●	●
			3R Combi	●	●	●
	MVH	20T	EROWA ITS*5	●	●	●
			EROWA ITS Combi*6	●	●	●
		40T	3R MACRO	×	×	●
			3R Combi	×	×	●
		40T	EROWA ITS	×	×	●
			EROWA ITS 50	×	×	●
Control unit	Communica-tion	External signal output (M code)		●	●	●
		LAN, DNC H/W*10, S/W, FTP*11		○	○	○
		ESPERADVANCE PRO lite*9		×	×	×
S/W		ESPERADVANCE PRO*9		○	○	○
		3D check function		○	○	○
		e-manual (electronic instruction manual)		○	○	○
Display		Built-in scheduler		○	○	○
		Anti-virus protection		○	○	○
		Run timer		●	●	●
Miscella-neous		Warning light (Tower type)		●	●	●
		Warning light (Built-in type)		●	●	●
		Simple operation manual in English		○	○	○
		Operation manual (paper)		○	○	○
		LED type working lamp DC24V		○	○	○

*4 Select the chuck from the following types. (3R-MACRO, 3R-Combi, EROWA-ITS50) (Automatic clamp is not available at 3R -Combi)
*5 For 3R Combi Macro and Macro Jr can be used.
*6 Only the ITS50 specification is available, and the centering plate 50 can be used.
*7 External signal output (M code with answer) is necessary for attaching external equipment that requires an answer signal.
*8 LAN cables should all be straight wiring with shielding connector, Category 5 (100BASETX compliant), STP (four-shielded twisted-pair). A switchable hub capable of supporting shielded LAN cables should be used.
*9 Proprietary personal computer is to be acquired separately.
*10 When selected, the machine installation dimensions will change.
*11 Recommendation option for ATC specifications.

Head-side tooling


* Tooling should be selected

Automatic clamp




Clamp spindle side holder with air chuck (photo shows EROWA-ITS chuck specifications)

High-rigidity C-axis

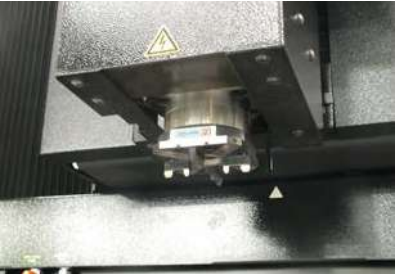

Supports parallel electrode setup and index machining
Supports fluid emission from spindle center (photo shows EROWA ITS50 chuck specifications)


High-accuracy built-in spindle (Only SG28)

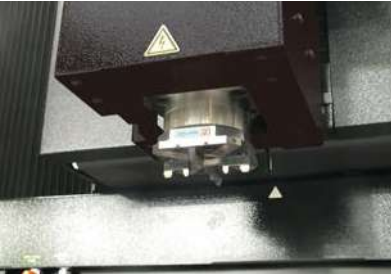

Supports high-speed rotation (1-1500min-1) machining
Supports fluid emission from spindle center (photo shows EROWA ITS50 chuck specifications)

ATC

LS type 10T (Auto Tool Changer)

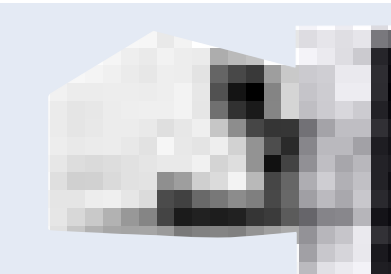

Change up to 10 electrodes
Supports continuous machining using many electrodes

LS type 20T (Auto Tool Changer)



Change up to 20 electrodes
Supports continuous machining using many electrodes


MVH type 20T/40T (Auto Tool Changer)



Change up to 20/40 electrodes
Supports continuous machining using many electrodes

Display

Warning light (Built-in type)

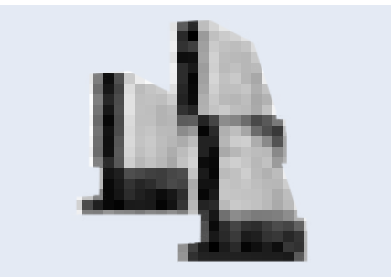

Machine operating status

Warning light (Tower type)



Machine operating status


Power supply

GV120




Tooling

EROWA System Chart

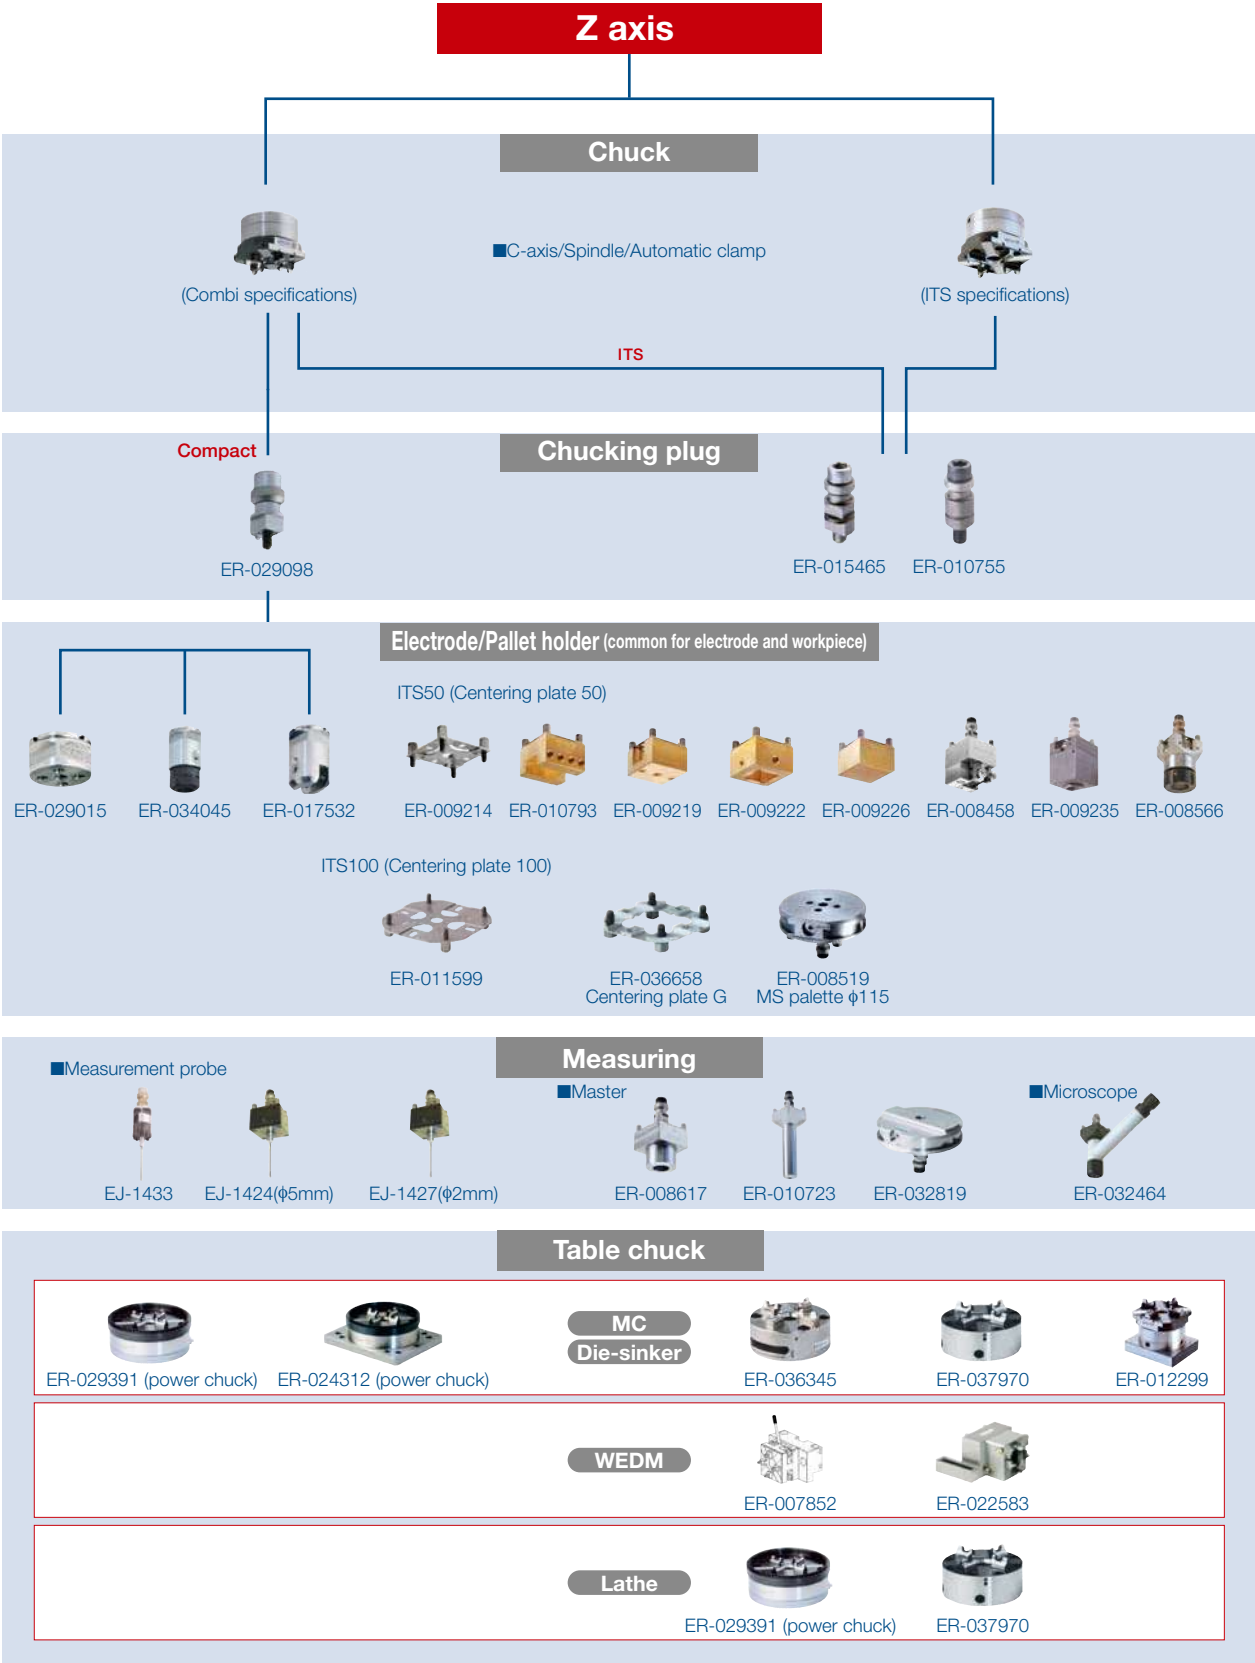

System 3R System Chart

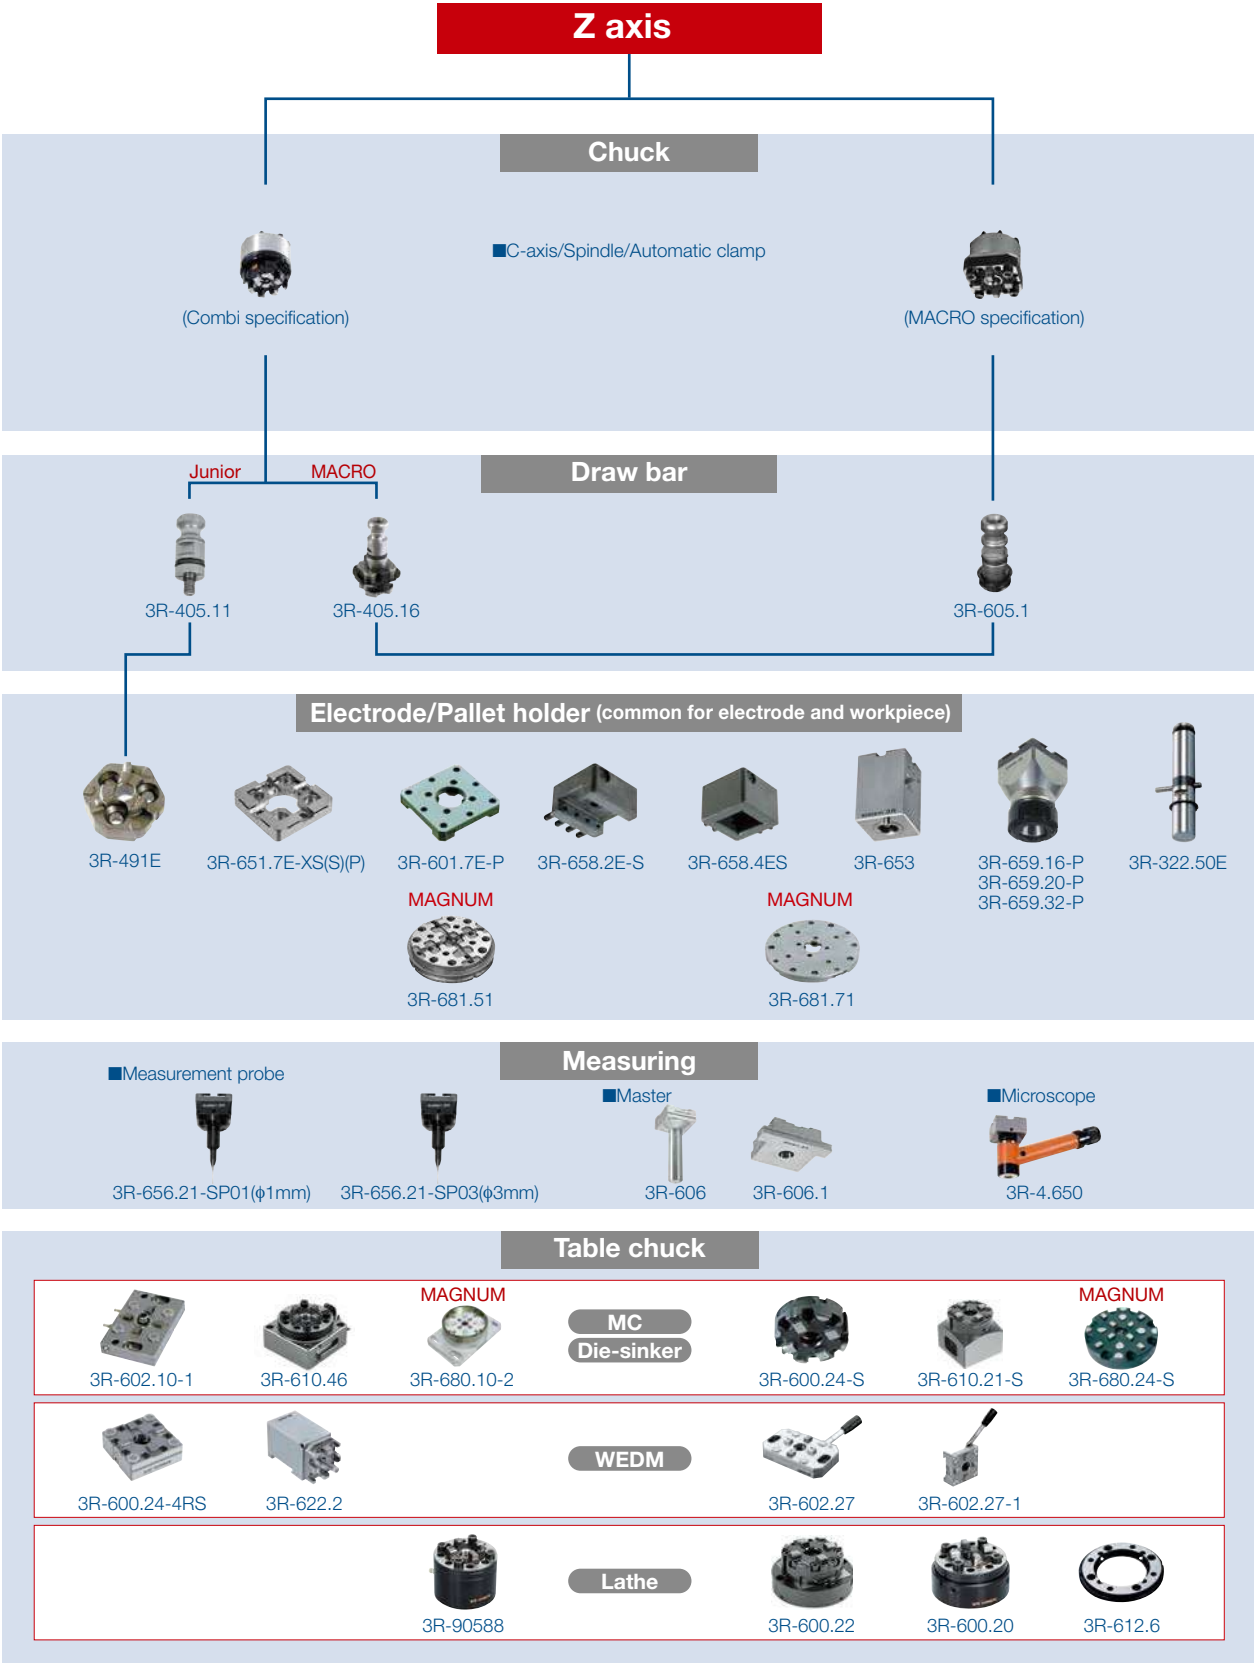

* Please contact EROWA Japan Co., Ltd. for detailed tooling specifications.

* Please contact System 3R Co., Ltd. for detailed tooling specifications.

Preparation for Machine Installation/ Cautions

Preparation for Machine Installation

Machine installation checklist

Determining the machining details

Check each item, and make sure that no item or order is overlooked.

1) Determine the workpiece	
2) Determine the machining site	
3) Determine the pre-processing site	
4) Determine the post-processing site	

Preparation of installation fixtures

1) Plan the installation fixtures	
2) Prepare or manufacture the fixtures	

Preparation of tooling and electrode

It normally takes one to two months for tooling delivery, so please place orders as early as possible

1) Determination of tooling and electrode	
2) Order, preparation or manufacture	

Training of programmers and operators

1) Select the programmers and operators	
2) Apply for training seminars	

Confirmation of foundation and power-supply work

If there is any possibility of radio disturbance, investigate it prior to starting work.

1) Confirmation of floor area	
2) Confirmation of environment (constant-temperature dust-proof room, measure for radio disturbance, prevention of external noise)	
3) Confirmation of foundation floor	
4) Foundation work	
5) Primary wiring for power lead-in	
6) Grounding work	
7) Air piping work	

Confirmation of delivery path

Check the path inside and outside the factory to avoid any trouble during delivery.

1) Traffic restrictions to factory	
Road width	
Entry road	
2) Factory entrance and width of gate in factory	(m)
Factory building entrance dimensions (height x width)	(m)
3) Constant-temperature dust-proof room entrance dimensions (height x width)	(m)

Cautions

The standard delivery entrance dimensions for standard shipment delivery are given on the product line-up page. If the entrance is smaller than the standard delivery entrance, a machine with different dimensions can be shipped.
* Please contact a Mitsubishi Electric representative for details (a separate estimate will be issued).
Note that delivery may not be possible in some cases depending on the dimensions.

File applications to fire department (Installation in Japan)

The applications must be filed before the EDM is installed.

1) Confirm the dielectric fluid amount	
2) File applications to fire department (EDMs already installed must also be filed.)	
•Application for "Facility using fire" (fluid amount less than 400ℓ)	
•Application for "Low volume hazardous material storage and handling site" (fluid amount more than 400ℓ and less than 2,000ℓ)	
•Application for "General handling site" (fluid amount 2,000ℓ or more)	

The required applications differ according to country and region; please contact your nearest fire department for details.

Oil for EDMs

Always use dielectric fluid which has a flash point of 70°C or more.

Prepare the following dielectric fluid when operating the EDMs.

■ Dielectric fluid example

- Paracol 250 (Shell Lubricants Japan)
- Metal Work EDF-K2 (JXTG Nippon Oil & Energy Corporation)
- * Dielectric fluid properties might be changed without notice by the manufacturer. Please contact the manufacturer for the Material Safety Data Sheet (SDS/MSDS).

Installation conditions

1. Installation site

- Constant-temperature dust-proof room
 - Recommended room temperature 20±1°C (68°F±2)
 - Usable temperature range 5 to 35°C (41°F to 95°F)
 - Temperature fluctuation will directly affect machine accuracy. To maintain performance accuracy, select a place with minimal temperature fluctuation.
 - Note that an environment where the temperature fluctuates by 3°C (5°F) or more within 24 hours, or 1°C (2°F) or more within one hour can adversely affect machining accuracy. Make sure that the machine body is not subject to direct wind from air-conditioners or to direct sunlight.
 - Dust-free location is recommended.
 - Install a EDM in an environment with no corrosive gases, such as acid or salt, or mist, and with low levels of dust.
 - Grinding dust can adversely affect the machine's linear scales and ball screws.
 - Pay special attention to installation location to avoid this hazard (separate from grinding machine, or install in separate room, etc.).
 - Humidity Within 30 to 75%RH (with no dew condensation).
 - Temperature range during transportation and storage
 - -25 to 55°C (-13°F to 131°F) (when power is not connected).
- Tolerable vibration of floor
 - EAB5/12S, EA28V ADVANCE, EA40/EA50 ADVANCE specification, SG8, SG12
 - Select a floor where vibration or impact will not be conveyed.
 - As a reference, the vibration level should have a max. amplitude of 5µm or less at a 10 to 20Hz frequency.
 - SV8P, SV12P, EA8PS, EA12PS
 - Select a floor where vibration or impact will not be conveyed.
 - As a reference, the vibration level should have a max. amplitude of 2µm or less at a 10 to 20Hz frequency.
 - * Consult with the contractor or vibration measuring instrument manufacturer for details on the measuring method.

- Foundation
 - The floor should be concrete with a thickness of 400mm (15.7") or more so it can sufficiently withstand the system's weight.
- Room construction
 - The room where the EDM is to be installed must be a non-flammable or fire-proof structure.
 - Please contact your local fire department for details.
- Ventilation of combustible vapors
 - Install a ventilator to effectively remove combustible vapors and fine powders.

2. Machine heating value

Use the equipment capacity to calculate the EDM's heating value required for designing a constant-temperature room.

Heating value (kW) = Equipment capacity (kVA) x 0.6 Example: For SG12 + GV80, 7.0kVA x 0.6 = 4.2kW
--

The above value is a guideline. Consult with the constant-temperature room manufacturer for details.

3. Power-supply equipment

- Primary wiring
 - Normal machining : 3-phase AC200/220V±10% 60Hz, 3-phase AC200V±10% 50Hz
 - High-accuracy machining : 3-phase AC200/220V±4% 60Hz, 3-phase AC200V±4% 50Hz
 - An automatic voltage regulator (AVR) should be used if voltage fluctuations exceed that value above.
 - Do not power on in instantaneous power failure occurrence that exceeds 20msec.
 - A single-phase AC night power source for the automatic fire extinguisher : AC100V±10%(50/60Hz)
- Power capacity
 - Facility capacity [kVA] = Total power input (Machine input + power supply input + dielectric fluid chiller unit input) [kVA]
 - Refer to page 25 for details on the machine, power supply and dielectric fluid chiller unit.
- No-fuse breaker and earth-leakage breaker
 - When selecting a no-fuse breaker or earth-leakage breaker for the primary side of the EDM, calculate the total facility capacity, and select the breaker using the following table as a reference.

Total facility capacity [kVA]	No-fuse breaker	Earth-leakage breaker
11.9 or less	NF50-CV(50A)	NV50-CV(50A)
12 to 21.9	NF100-CV(100A)	NV100-CV(100A)
22 to 33	NF225-CV(150A)	NV225-CV(150A)

The breakers in the table allow for the rush current of the transformer in the power supply panel.

• Selecting the power input cable size

The following table is a guide for calculating the appropriate power cable size to use based on total capacity. The cable size should be sufficient to allow some leeway.

Total facility capacity [kVA]	Cable size [mm²]	Total facility capacity [kVA]	Cable size [mm²]
8.9 or less	5.5	15 to 20.9	22.0
9 to 11.9	8.0	21 to 28	30.0
12 to 14.9	14.0		

4. Grounding work

- The EDMs must always be grounded to prevent external noise, radio disturbance and earth leakage.
- Install a EDM in an environment with no corrosive gases, such as acid or salt, or mist, and with low levels of dust.
- Common grounding can be used if noise from other devices will not enter through the common grounding; the grounding cable must be connected independently to the grounding location (Fig. 2).
 - Use a 14mm² grounding wire.




Fig. 1




Fig. 2

5. Primary air equipment

- The standard SG specifications do not require an air source, but an air supply must be prepared when using the optional high-accuracy built-in C-axis etc.
- Hose diameter : 1/4 hose (hose sleeve outer diameter: ø9.0 (.35"))
 - Pressure : 0.5 to 0.7MPa (72.5 to 101.5psi) (0.6MPa (87) or more when using EROWA tooling specifications)
 - Flow rate : 27ℓ/min or more (2.65cu.ft./min.)
 - * Install an air filter equipped with an air dryer or drainage discharge mechanism in the air source (primary source) piping to prevent moisture and impurities from entering the air pressure device.

6. Shield room

Install a shield room if the EDM affects televisions or other communication facilities in the area. Observe the following points when installing the EDM in the shield room.

1. Ground the EDM in the shield room (Fig. 3).
2. If the EDM cannot be grounded in the shield room, connect the EDM's grounding cable to the shield room's grounding terminal (through bolt) as shown in Fig. 4.
3. Consult with a Mitsubishi Electric representative for details on installing a shield room.




Fig. 3




Fig. 4

Precautions for selecting earth-leakage breaker

To prevent malfunctions caused by the external noise from control units, etc., a filter is installed for the power-supply input. By grounding one end of this filter, an earth-leakage current of approx. 30 to 40mA passes through the filter. A highly sensitive earth-leakage breaker (sensitivity current 30mA) could malfunction. Thus, a medium-sensitivity earth-leakage breaker (sensitivity current 100 to 200mA) is recommended for the EDM. Class C grounding (grounding resistance of 10Ω or less) is recommended for the EDM. Even if the sensitivity current is 200mA, the contact voltage will be 2V or less, and no problems will occur in preventing electric shock (application of tolerable contact current Class 2, 25V or less).


Refrigerant for dielectric fluid chiller

The dielectric fluid chiller unit includes a fluorinated greenhouse gas R407C or R410A (for booster power). Please use only the specified refrigerant (R407C or R410A), when servicing the dielectric fluid chiller unit. The use of any refrigerant other than that specified will cause mechanical failure, system malfunction or unit breakdown. In the worst case, this could lead to a serious impediment to securing product safety.

Cautions

Preventing fires and accidents with EDMs

Never attempt the following operation methods. These are extremely hazardous.

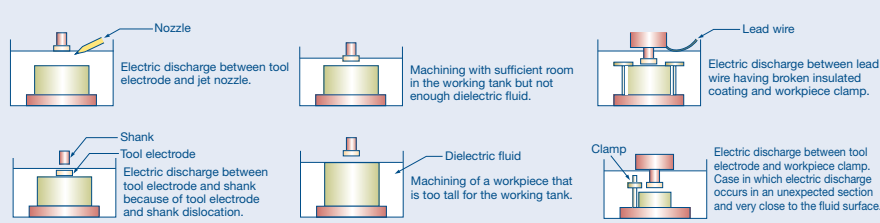

- Ensure that the upper part of the workpiece is submerged by 50mm (1.97") or more GV80P or 100mm (3.94") or more GV120P from the surface of the dielectric fluid
- Never conduct spray machining as there is a risk of fire
- Do not use equipment that produces heat or sparks such as heating systems, welding machines, or grinding machinery near the EDM
- Always keep the area clean and tidy, and do not store flammable materials near the EDM
- Install an extra fire extinguisher in addition to the automatic fire extinguisher enclosed with the EDM
- Ensure that the area is sufficiently ventilated
- Monitoring automatic operation : For safety purposes, make sure an operator is always present during operation, even if various safety devices are equipped, so that appropriate actions can be taken

Safety measures

A dielectric fluid temperature detector, fluid level detector, abnormal machining detector and automatic fire extinguisher, standard equipment, and a flame-resistant metal hose is used. A tank which has passed the type test of electrical-discharge machine of Hazardous Materials Safety Techniques Association is used (for tank capacities less than 2,000ℓ, tanks which have passed a voluntary water leakage test). Note that the safety devices must be periodically inspected. Refer to the instruction manual (safety manual) when using the EDM.



Automatic fire extinguisher

When heat is detected, a light-water solution is automatically sprayed to extinguish the fire. Machining also stops automatically at this time.

A separate AC100V power supply is required for the automatic fire extinguisher.



Dielectric fluid temperature and fluid level detector

Machining is automatically stopped when the dielectric fluid temperature reaches approx. 60°C, or when the fluid level drops during machining.

Terms of warranty

1. Terms of warranty

This will differ according to country and region of sale; please contact a Mitsubishi Electric representative for details.

2. Coverage

(1)Terms of repairment free of charge

Parts labor and travel are included free of charge when the failure occurs during normal use for the stated Terms of the warranty (based on proper usage and maintenance as described in the operations manual and sales agreement).

Coverage exceptions:

- ① When a failure occurs that was caused by a machine modification that directly affects the machine's functioning or accuracy.
- ② When a failure occurs caused by the use of non-standard parts, consumables or lubricants.
- ③ When a failure occurs caused by a natural disaster such as lighting, earthquake or storms and flooding.
- ④ When the use of non-recommended consumables or aftermarket parts are used such as filters or flushing nozzles.

(2)Exclusion of loss in opportunity and secondary loss from warranty liability

Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation to:

- ① Damages caused by any cause found not to be the responsibility of Mitsubishi.
- ② Loss in opportunity, lost profits incurred to the user by Failures of Mitsubishi products.
- ③ Special damages and secondary damages whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi products.
- ④ Replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.

(3)Information regarding what should be revised or improved acquired during product support may be used to improve product quality or services.

3. Post Warranty / Expected Service Life


After the warranty period expires, all standard service rates and travel expenses will apply. Normal service life expectancy is 11 years after installation, but there may be some cases where discontinued electrical parts such as semiconductors and motors will reduce this period.

FA Machinery and Automation Products


Global Production Bases



①Nagoya / Industrial Mechatronics Systems Works
Programmable controllers, display panels (HMI), AC servos, inverters, industrial robots, CNCs for power distribution transformers, EDMs, laser processing machines



②Kani Factory
Electromagnetic switchgear



③Shinshiro Factory
3-phase motors, IPM motors



④Fukuyama Works
Power management meters, energy-saving UPS support devices, low-voltage circuit breakers



⑤Nagatsugawa Works
Pressurized ventilators



⑥Power Distribution Systems Center
High-voltage circuit breakers, high-voltage electromagnetic contactors



⑦Mitsubishi Electric Factory
Industrial Products Corporation
Geared motors



⑧Tada Electric Co., Ltd.
Electron-beam processing machines




⑨China (Dalian)
Mitsubishi Electric Dalian Industrial Products Co., Ltd.
Inverters, low-voltage circuit breakers, electromagnetic switchgear EDMs, laser processing machines



④China (Changshu)
Mitsubishi Electric Automation Manufacturing (ChangShu) Co., Ltd.
Programmable controllers, display panels (HMI), AC servo CNCs




③China (Xiamen)
Mitsubishi Electric Low Voltage Equipment (Xiamen) Co., Ltd.
Low-voltage circuit breakers




②Thailand (Bangkok)
Mitsubishi Electric Automation (Thailand) Co., Ltd.
3-phase motors



①India (Pune)
Mitsubishi Electric India Pvt. Ltd.
Inverters

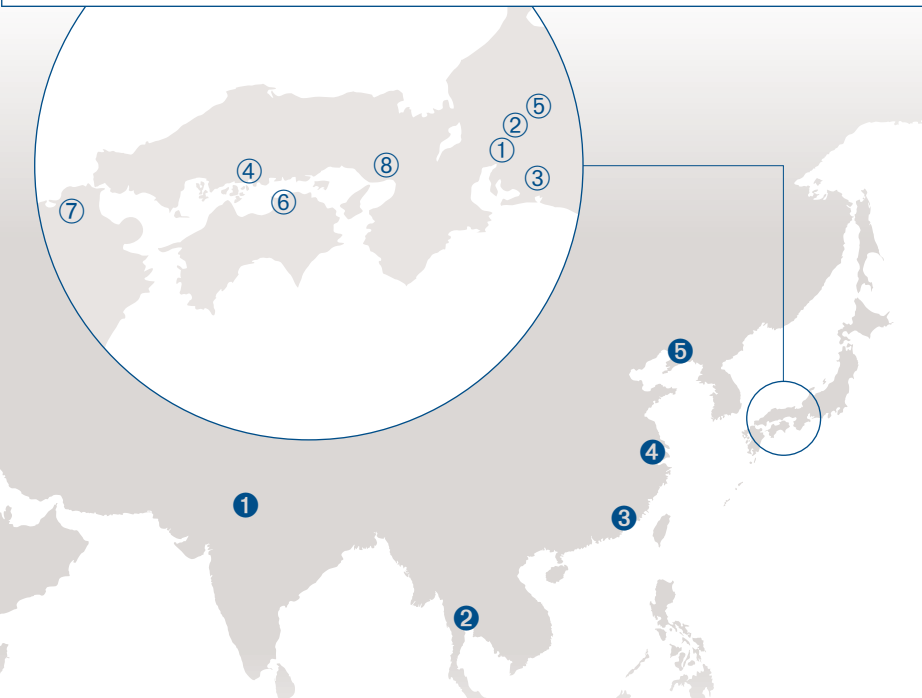

YOUR SOLUTION PARTNER

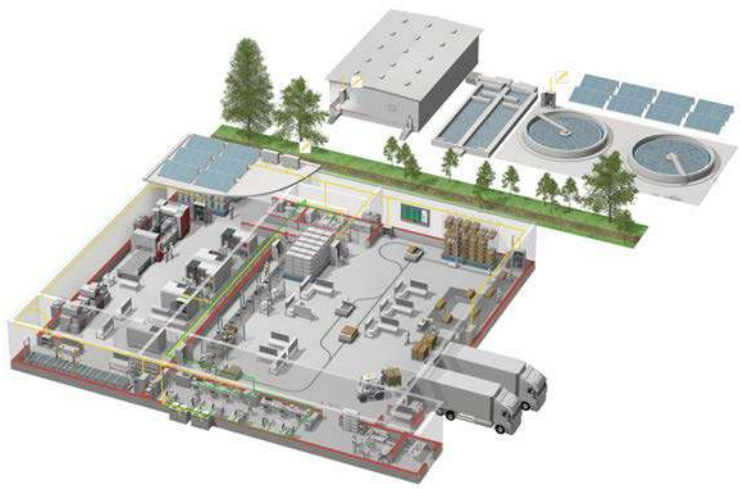

Mitsubishi Electric offers a wide range of automation equipment from PLCs and HMIs to CNC and EDM machines.

A NAME TO TRUST

Since its beginnings in 1870, some 45 companies use the Mitsubishi name, covering a spectrum of finance, commerce and industry.

The Mitsubishi brand name is recognized around the world as a symbol of premium quality.

Mitsubishi Electric Corporation, established in 1921, is active in space development, transportation, semi-conductors, energy systems, communications and information processing, audio visual equipment and home electronics, building and energy management and automation systems, and has 183 factories, laboratories and offices worldwide in over 140 countries.

This is why you can rely on Mitsubishi Electric automation solution - because we know first hand about the need for reliable, efficient, easy-to-use automation and control in our own factories.

As one of the world's leading companies with a global turnover of over 4 trillion Yen (over \$40 billion), employing over 146,000 people, Mitsubishi Electric has the resource and the commitment to deliver the ultimate in service and support as well as the best products.



Low-voltage Power Distribution Products



Transformers, Med-voltage Distribution Products



Power Monitoring and Energy Saving Products



Power (UPS) and Environmental Products



Compact and Modular Controllers



Servos, Motors and Inverters



Visualization: HMIs



Edge Computing Products



Numerical Control (NC)



Collaborative and Industrial Robots



Processing machines: EDM, Lasers

* Not all products are available in all countries.

Global Partner. Local Friend.



Visit us on



[YouTube] [YouTube logo] is a trademark or registered trademark of Google Inc.

mitsubishi electric corporation

HEAD OFFICE: TOKYO BLDG., 2-7-3 MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
www.MitsubishiElectric.com/fa